


ecoAIR⁺ PRO



Models

ecoAIR ⁺ 1-7 PRO		Single-phase 230 Vac
ecoAIR ⁺ 1-9 PRO		
ecoAIR ⁺ 3-12 PRO		
ecoAIR ⁺ 3-18 PRO		Three-phase 400 Vac
ecoAIR ⁺ 6-24 PRO		

Monobloc heat pump

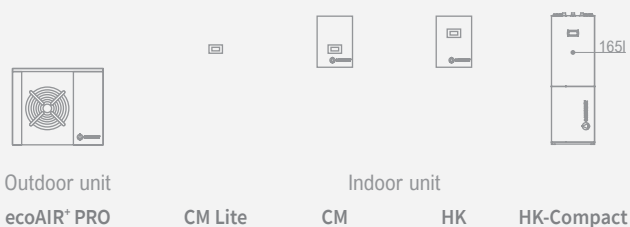

Services




Compatible production systems



Management of shunt groups



Performance



Cascade




Characteristics


- Modulating thermal output control across a wide range (17%–100%), fan speed control (20%–100%), and modulating flow control in the production circuit (20%–100%).
- Natural refrigerant R290: GWP 3.
- Inverter technology.
- Compact design incorporating the production circulator in the outdoor unit.
- Hydraulic connection between the outdoor and indoor modules.
- High Temperature Recovery (HTR) system for domestic hot water (DHW) production up to 70 °C without auxiliary support, and simultaneous DHW and heating/cooling production in ecoAIR⁺ 6–24 PRO model.
- Integrated control of one flow temperature, one buffer tank (for heating and cooling), and one DHW tank with the CM Lite indoor unit.
- Integrated control of up to three different flow temperatures, two buffer tanks (heating and cooling), one DHW tank, one swimming pool, and time scheduling of DHW recirculation with CM, HK, and HK-Compact indoor units.
- Integrated cascade control of up to six heat pumps with CM indoor unit.
- Integrated control of simultaneous heating/cooling emission systems, depending on the system layout.
- Integrated control of external auxiliary backup systems—on/off or modulating (electric heaters, boilers, etc.).
- Reversible models with integrated active cooling production.
- Indoor unit selection based on project requirements.
- Models available in single-phase and three-phase versions.
- Integrated photovoltaic hybridisation.
- Integrated energy metering for electrical consumption, thermal output (heating/cooling), and instantaneous and seasonal performance monthly and annual.

Operational chart


ecoAIR⁺ 1-7 PRO

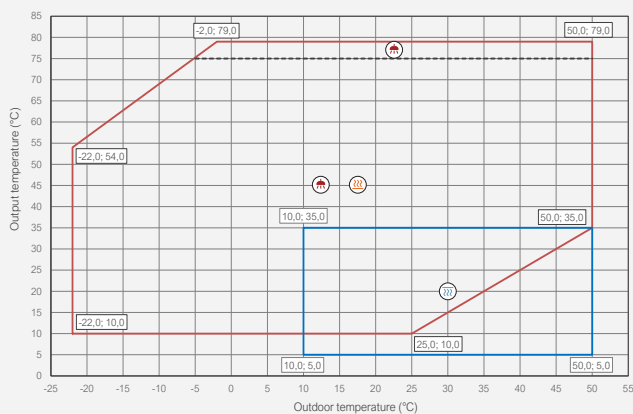

ecoAIR⁺ 1-9 PRO | ecoAIR⁺ 3-12 PRO | ecoAIR⁺ 3-18 PRO

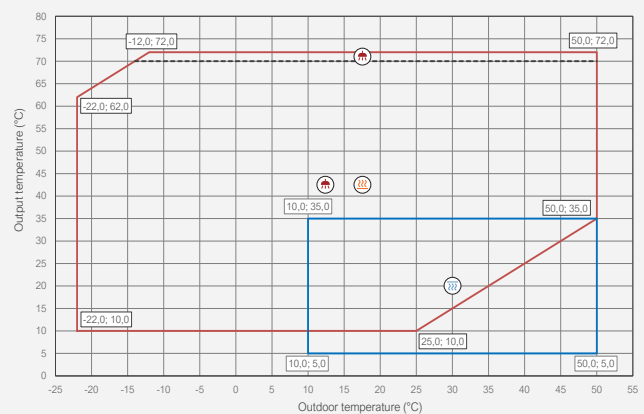

ecoAIR⁺ 6-24 PRO

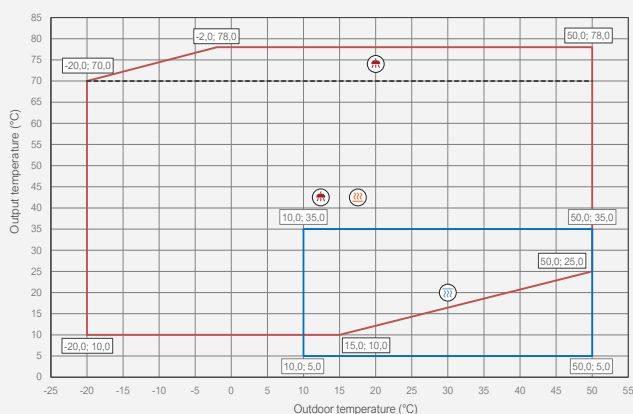


ecoAIR⁺ 6-24 PRO

Air to water heat pumps with Inverter technology and natural refrigerant R290


SPECIFICATIONS ecoAIR ⁺ PRO			ecoAIR ⁺ 6-24 PRO
APPLICATION	Place of installation	-	Outdoor
	Collection system	-	Air source
	DHW, Heating and Pool heating	-	■
	Integrated active cooling	-	■
PERFORMANCE	Compressor modulation range	%	22 - 100
	⁽²⁾ Heating power output / COP A7W35	kW / -	4,8 - 27,5 / 5,1
	⁽²⁾ Heating power output / COP A7W55	kW / -	6,5 - 25,9 / 3,2
	⁽²⁾ Cooling power output / EER A35W7	kW / -	4,7 - 20,5 / 3,6
	⁽⁶⁾ Max. DHW temperature without / with support	°C	78 / 80
	⁽⁶⁾ Maximum noise power level (LWA)	dB (A)	63
	Energy label / η_s / SCOP W35 average clim. with control	-	A+++ / 184 % / 4,58
OPERATION LIMITS	Energy label / η_s / SCOP W55 average clim. with control	-	A++ / 140% / 3,47
	Distribution / Set heating outlet temperature range	°C	10 - 70 / 20 - 70
	Distribution / Set cooling outlet temperature range	°C	5 - 30 / 7 - 30
	Outdoor temperature range	°C	-20 - 50
	Minimum / Maximum refrigerant circuit pressure	bar	0,5 / 25,5
WORKING FLUIDS	Production circuit pressure range	bar	0,5 - 6,0
	R290 refrigerant load (GWP: 3)	kg	1,75
	Compressor oil type / load	kg	RFL68 EP / 1,18
	Flow rate (Pmax, A7W35) ΔT 5°C / ΔT 7°C	m³/h	4,7 / 3,4
	Min. water volume for defrosting (35°C, ΔT 5°C)	l	250,0
	Nominal air flow rate	m³/h	10150
CONTROL ELECTRICAL DATA	⁽⁶⁾ 1/N/PE 230 V / 50-60 Hz	-	■
	⁽⁹⁾ Recommended external protection	-	C6A
	Transformer primary circuit fuse	A	0,5
	Transformer secondary circuit fuse	A	2,5
HEAT PUMP ELECTRICAL DATA: THREE-PHASE VERSION	⁽⁶⁾ 3/N/PE 400 V / 50-60 Hz	-	■
	⁽⁹⁾ Recommended external protection	-	C32A
	⁽²⁾ Maximum consumption A7W35	kW / A	6,8 / 9,9
	⁽²⁾ Maximum consumption A7W55	kW / A	9,1 / 13,2
	⁽²⁾ Maximum consumption	kW / A	17,0 / 25,0
	⁽⁷⁾ Minimum / Maximum starting current	A	3,0 / 12,0
DIMENSIONS & WEIGHT	Correction of cos ϕ	-	0,80 / 1
	Height x width x depth	mm	1675x1430x640
	Empty weight (without packaging)	kg	266

- Air-to-water by means of a brine-to water heat pump combined with a hydraulic outdoor air unit.
- In compliance with EN 14511, including circulation pumps, fan and compressor driver consumptions.
- Production flow rate according to EN 14511.
- Considering a heat slope from 20 to 50 °C in absence of consumption.
- Considering support provided by an emergency electrical heater or HTR. Max. DHW temp. with HTR can be limited by the compressor discharge temp.
- In compliance with EN 12102.
- Starting current depends on the working conditions of the hydraulic circuits.
- The admissible voltage range for proper operation of the heat pump is $\pm 10\%$.
- Maximum consumption can vary significantly according to working conditions, or if the compressor's operation range is restricted. Consult the technical service manual for more information.
- Certification in process.




Dimensions and hydraulic connections

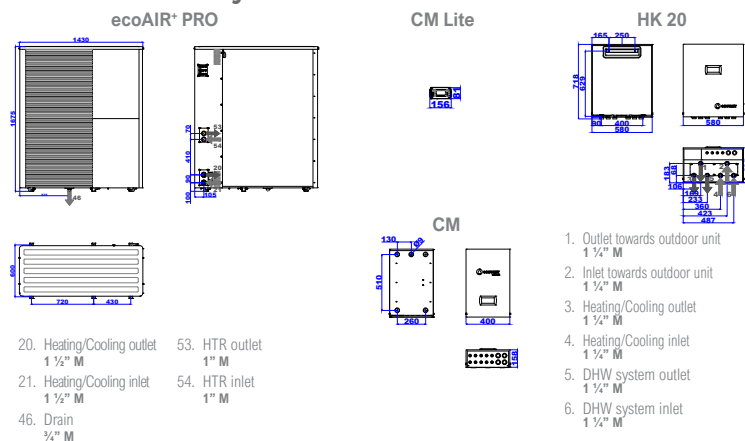




Available pressure drop

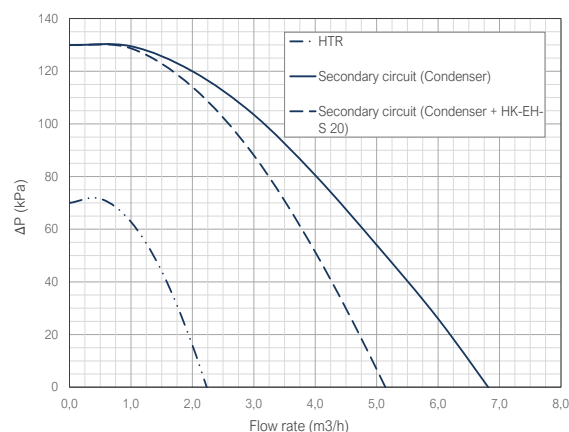




Heating W35

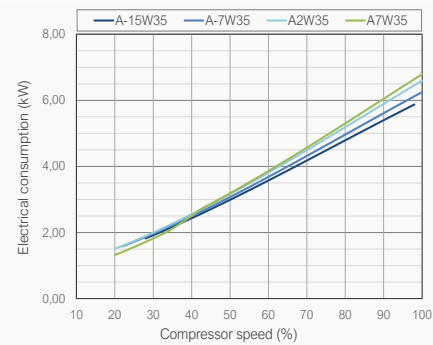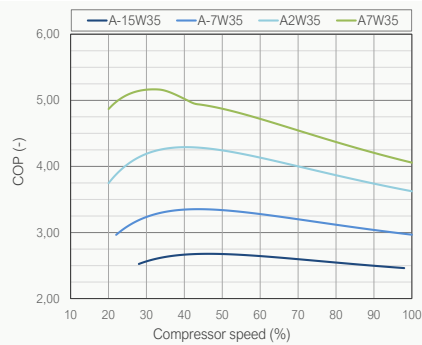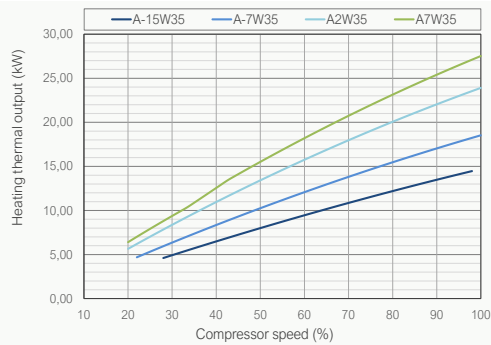




Heating W45

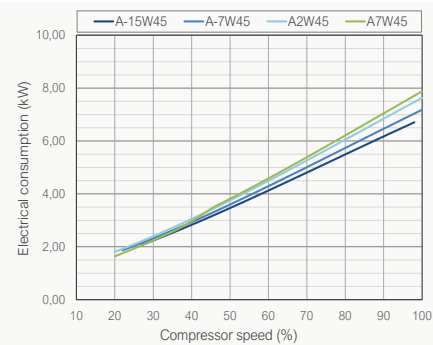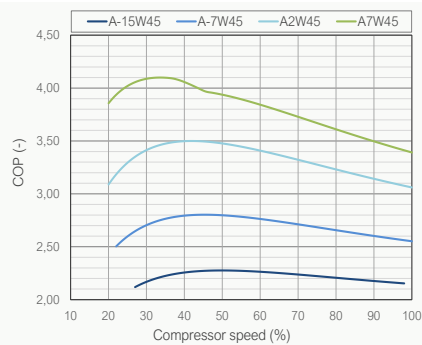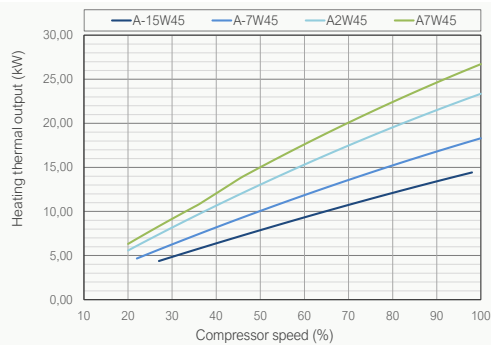

Heating W55

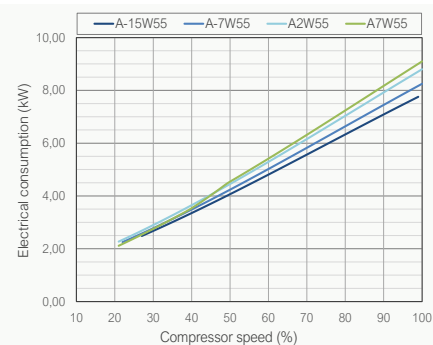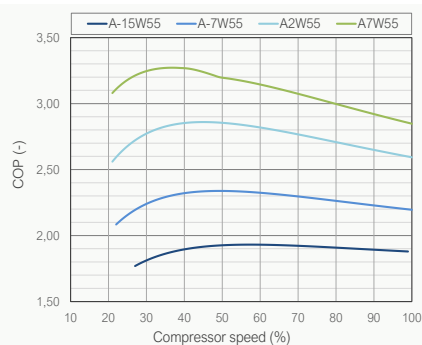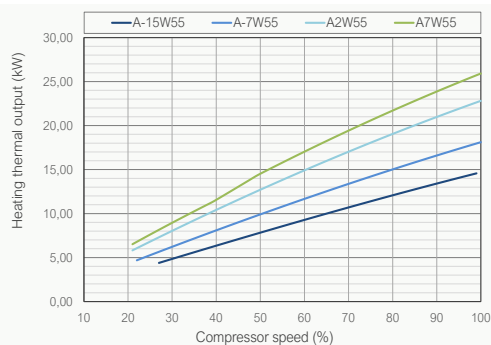

Cooling W7

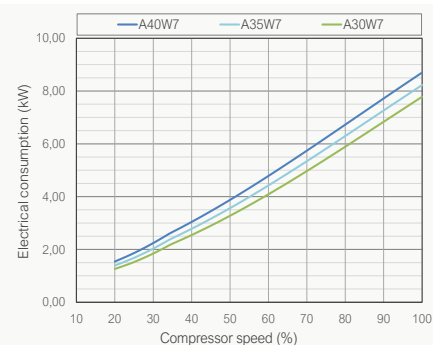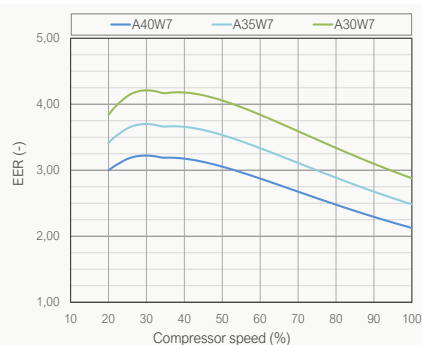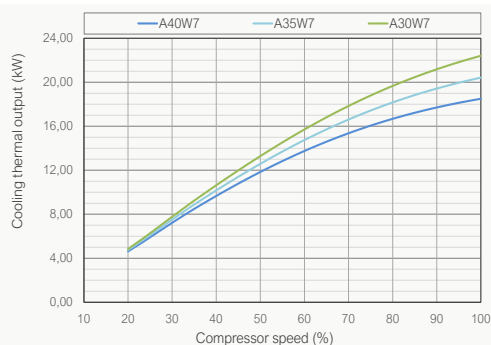

Thermal power - Outdoor temperature

